



CELEBRATING 40 YEARS IN BUSINESS

MULTILAYER VARISTORS



THIS PAGE WAS INTENTIONALLY LEFT BLANK.

Table of Contents

Standard Series 2
0402 Series Specifications 4
0603 Series Specifications 4
0805 Series Specifications 5
1206 Series Specifications 5
0402 Series Specifications 6
0603 Series Specifications 6

Standard Series

Features

1. SMD Type Chip Varistor provides high reliability for surface mount application.
2. Wide operating voltage range.
3. High transient current capability.
4. Good solderability. (Ni, Sn plating)
5. Nickel Barrier.

Applications

1. Transient Voltage Protection for IC and Transistor.
2. ESD and I/O Protection.
3. Telecommunication Transient Protection.
4. EFT / Burst Protection.

Ordering Information

WPMLVN 0402 - 050 A - T
 (1) (2) (3) (4) (5)

(1) Series

WPMLVN: Normal Capacitance series IEC-61000-4-5, Surge (8/20µs,10/1000µs) protection. Low voltage: 5.5V~56V

(2) Dimensions in Inches

0402 (= 1005mm)
0603 (= 1608mm)
0805 (= 2012mm)
1206 (= 3216mm)

(3) Maximum continuous working voltage

Code	Working Voltage	Code	Working Voltage
050	5.5	260	26
080	8	300	30
110	11	330	33
140	14	420	42
180	18	560	56

(4) Surge Energy: Measured in Joules

Code	A	B	C	D	E	F	G	H	I	J	K	L	M
Surge Energy	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.1	0.2	0.3	0.4

(5) Packaging


B: Bulk Package
T: Tape & Reel (Ø 178mm [7 inch])
L: Tape & Reel (Ø 254mm [10 inch])

Standard Series (continued)

Shape & Dimensions

unit : mm [inches]

Size	L	W	T (max.)	C
0402	1.0±0.05 [.039±.002]	0.5±0.05 [.020±.002]	0.55 [.022]	0.20±0.10 [.008±.004]
0603	1.6±0.15 [.063±.006]	0.8±0.15 [.031±.006]	0.95 [.037]	0.30±0.20 [.012±.008]
0805	2.0±0.2 [.079±.008]	1.25±0.2 [.049±.008]	1.2 [.047]	0.50±0.30 [.020±.012]
1206	3.2±0.2 [.126±.008]	1.6±0.2 [.063±.008]	1.4 [.055]	0.50±0.30 [.020±.012]

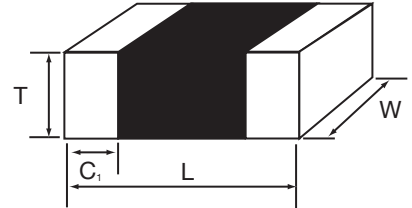

0402 Series Specifications

Part Number	Maximum Ratings				Electrical Characteristics			
	Working Voltage		Rated Single Pulse Transient		Varistor Voltage @ 1mA DC		Maximum Clamping Voltage	Typical Capacitance
	AC RMS	DC	Energy 10/1000µs	Peak 8/20µs	Min.	Max.	8/20µs	@1MHz
	Volts	Volts	Joules	Amps	Volts	Volts	Volts	pF
	V _{WAC}	V _{WDC} *	W _s	I _s	V _v		V _c **	C
WPMLVN0402-050E□	4.0	5.5	0.05	20	7.1	13.5	30	360
WPMLVN0402-080E□	5.7	8.0	0.05	20	9.6	12.5	24	280
WPMLVN0402-110E□	7.8	11.0	0.05	20	12.7	15.5	27	200
WPMLVN0402-140E□	10.0	14.0	0.05	20	15.9	20.3	30	120
WPMLVN0402-180E□	12.7	18.0	0.05	20	21.5	28.0	40	90

0603 Series Specifications

Part Number	Maximum Ratings				Electrical Characteristics			
	Working Voltage		Rated Single Pulse Transient		Varistor Voltage @ 1mA DC		Maximum Clamping Voltage	Typical Capacitance
	AC RMS	DC	Energy 10/1000µs	Peak 8/20µs	Min.	Max.	8/20µs	@1MHz
	Volts	Volts	Joules	Amps	Volts	Volts	Volts	pF
	V _{WAC}	V _{WDC} *	W _s	I _s	V _v		V _c **	C
WPMLVN0603-050J□	4.0	5.5	0.1	30	7.1	13.5	30	670
WPMLVN0603-080J□	5.7	8.0	0.1	30	9.6	12.5	24	470
WPMLVN0603-110J□	7.8	11.0	0.1	30	12.7	15.5	27	400
WPMLVN0603-140J□	10.0	14.0	0.1	30	15.9	20.3	30	360
WPMLVN0603-180J□	12.7	18.0	0.1	30	21.5	28.0	40	300

*V_{WDC}: Leakage Current at 25°C is under 50µA at V_{WDC}

**V_c: Maximum Peak voltage at a specied pulse current and waveform

Energy Rating	Pulse & waveform
0.05 Joules	1A 8/20µs
0.10 Joules	2A 8/20µs
0.20-0.30 Joules	5A 8/20µs

Note: Parts with other electrical characteristics available upon request.

0805 Series Specifications

Part Number	Maximum Ratings				Electrical Characteristics			
	Working Voltage		Rated Single Pulse Transient		Varistor Voltage @ 1mA DC		Maximum Clamping Voltage	Typical Capacitance
	AC RMS	DC	Energy 10/1000µs	Peak 8/20µs	Min.	Max.	8/20µs	@1MHz
	Volts	Volts	Joules	Amps	Volts	Volts	Volts	pF
V _{WAC}	V _{WDC} *	W _s	I _s	V _v		V _c **	C	
WPMLVN0805-050L□	4.0	5.5	0.3	120	7.1	13.5	30	3000
WPMLVN0805-080L□	5.7	8.0	0.3	120	9.6	12.5	24	1900
WPMLVN0805-110L□	7.8	11.0	0.3	120	12.7	15.5	27	1600
WPMLVN0805-140L□	10.0	14.0	0.3	100	15.9	20.3	30	1500
WPMLVN0805-180L□	12.7	18.0	0.3	100	21.5	28.0	40	1200
WPMLVN0805-260L□	18.4	26.0	0.3	100	29.0	38.5	58	750
WPMLVN0805-050J□	4.0	5.5	0.1	40	7.1	13.5	30	1600
WPMLVN0805-080J□	5.7	8.0	0.1	40	9.6	12.5	24	900
WPMLVN0805-110J□	7.8	11.0	0.1	40	12.7	15.5	27	760
WPMLVN0805-140J□	10.0	14.0	0.1	40	15.9	20.3	30	700
WPMLVN0805-180J□	12.7	18.0	0.1	30	21.5	28.0	40	570
WPMLVN0805-260J□	18.4	26.0	0.1	30	29.0	38.5	58	430

1206 Series Specifications

Part Number	Maximum Ratings				Electrical Characteristics			
	Working Voltage		Rated Single Pulse Transient		Varistor Voltage @ 1mA DC		Maximum Clamping Voltage	Typical Capacitance
	AC RMS	DC	Energy 10/1000µs	Peak 8/20µs	Min.	Max.	8/20µs	@1MHz
	Volts	Volts	Joules	Amps	Volts	Volts	Volts	pF
V _{WAC}	V _{WDC} *	W _s	I _s	V _v		V _c **	C	
WPMLVN1206-050M□	4.0	5.5	0.4	150	7.1	13.5	30	5800
WPMLVN1206-080M□	5.7	8.0	0.4	150	9.6	12.5	24	4500
WPMLVN1206-110M□	7.8	11.0	0.4	150	12.7	15.5	27	3800
WPMLVN1206-140M□	10.0	14.0	0.4	150	15.9	20.3	30	3400
WPMLVN1206-180M□	12.7	18.0	0.4	150	21.5	28.0	40	2600
WPMLVN1206-260M□	18.4	26.0	0.4	120	29.0	38.5	58	1900
WPMLVN1206-330M□	23.3	33.0	0.4	120	38.0	47.0	72	1100
WPMLVN1206-420M□	30.0	42.0	0.4	100	46.0	58.0	86	600
WPMLVN1206-560M□	40.0	56.0	0.4	100	58.0	76.0	110	400
WPMLVN1206-050J□	4.0	5.5	0.1	40	7.1	13.5	30	3300
WPMLVN1206-080J□	5.7	8.0	0.1	40	9.6	12.5	24	2800
WPMLVN1206-110J□	7.8	11.0	0.1	40	12.7	15.5	27	2400
WPMLVN1206-140J□	10.0	14.0	0.1	40	15.9	20.3	30	2000
WPMLVN1206-180J□	12.7	18.0	0.1	30	21.5	28.0	40	1800

*V_{WDC}: Leakage Current at 25°C is under 50µA at V_{WDC}

**V_c: Maximum Peak voltage at a specied pulse current and waveform

Energy Rating	Pulse & waveform
0.05 Joules	1A 8/20µs
0.10 Joules	2A 8/20µs
0.20-0.30 Joules	5A 8/20µs
0.40 Joules	10A 8/20µs

Note: Parts with other electrical characteristics available upon request.

0402 Series Specifications

Part Number	Maximum Ratings		Electrical Characteristics			
	Working Voltage		Varistor Voltage @ 1mA DC		Maximum Clamping Voltage	Typical Capacitance
	AC RMS	DC	Min.	Max.	8/20µs	@1MHz
	Volts	Volts	Volts	Volts	Volts	pF
	V _{WAC}	V _{WDC} ⁽¹⁾	V _V		V _C ⁽²⁾	C
WPMLVL0402-050A100□*	4.0	5.5	9.7	13.5	35	10
WPMLVL0402-050A400□*	4.0	5.5	9.7	13.5	30	40
WPMLVL0402-050A101□*	4.0	5.5	9.7	13.5	25	100
WPMLVL0402-050A201□*	4.0	5.5	9.7	13.5	25	200 (typ)
WPMLVL0402-050E361□*	4.0	5.5	9.7	13.5	30	360 (typ)
WPMLVL0402-080A100□*	5.7	8.0	14.0	17.8	40	10
WPMLVL0402-080A400□*	5.7	8.0	14.0	17.8	35	40
WPMLVL0402-080A101□*	5.7	8.0	14.0	17.8	30	100
WPMLVL0402-140A100□*	10.0	14.0	18.0	24.0	45	10
WPMLVL0402-140A400□*	10.0	14.0	18.0	24.0	40	40
WPMLVL0402-180A050□*	12.7	18.0	24.0	32.0	70	5
WPMLVL0402-180A100□*	12.7	18.0	24.0	32.0	60	10
WPMLVL0402-180A400□*	12.7	18.0	24.0	32.0	50	40
WPMLVL0402-180A900□*	12.7	18.0	24.0	32.0	50	90 (typ)

0603 Series Specifications

Part Number	Maximum Ratings		Electrical Characteristics			
	Working Voltage		Varistor Voltage @ 1mA DC		Maximum Clamping Voltage	Typical Capacitance
	AC RMS	DC	Min.	Max.	8/20µs	@1MHz
	Volts	Volts	Volts	Volts	Volts	pF
	V _{WAC}	V _{WDC} ⁽¹⁾	V _V		V _C ⁽²⁾	C
WPMLVL0603-050A100□*	4.0	5.5	9.7	13.5	35	10
WPMLVL0603-050A400□*	4.0	5.5	9.7	13.5	30	40
WPMLVL0603-050A101□*	4.0	5.5	9.7	13.5	25	100
WPMLVL0603-050E251□*	4.0	5.5	9.7	13.5	25	250 (typ)
WPMLVL0603-080A100□*	5.7	8.0	14.0	17.8	40	10
WPMLVL0603-080A400□*	5.7	8.0	14.0	17.8	35	40
WPMLVL0603-080A101□*	5.7	8.0	14.0	17.8	30	100
WPMLVL0603-140A100□*	10.0	14.0	18.0	24.0	45	10
WPMLVL0603-140A400□*	10.0	14.0	18.0	24.0	40	40
WPMLVL0603-180A050□*	12.7	18.0	24.0	32.0	70	5
WPMLVL0603-180A100□*	12.7	18.0	24.0	32.0	60	10
WPMLVL0603-180A400□*	12.7	18.0	24.0	32.0	50	40
WPMLVL0603-180E101□**	12.7	18.0	24.0	32.0	45	100 (typ)

- 1.) V_{WDC}: Leakage Current at 25°C is under 20µA at V_{WDC}
- 2.) V_C: Maximum Peak voltage at a specied pulse current and waveform.
Pulse & Waveform
1A 8/20µs

Note: Parts with other electrical characteristics available upon request.

DISCLAIMER: The names of the products and the specifications in this catalog are subject to change without notice for the sake of improvement. World Products, LLC also reserves the right to discontinue any of these products. The products in this catalog are intended for use in ordinary electronic products. If any of these products are to be used in special applications requiring extremely high reliability, where product defects might pose a safety risk, please consult World Products, LLC. Though World Products, LLC has taken all possible precautions to ensure the quality and reliability of its products, improper use of products may result in bodily injury, fire, or similar accident. If you have any questions regarding the use of the products in question, please consult World Products, LLC. Please be advised that World Products, LLC accepts no responsibility for any infraction by users of World Products, LLC products on third party patents or industrial copyrights.