


- Both single and double coil latching types available.
- Excellent load capacity, can switch 200A/440VAC.
- Accessories can be customized as required.
- RoHS compliant.

Contact Parameter		
Contact form	2B	
Contact resistance (1A 6VDC)	Max.1mΩ	
Contact material	Silver Alloy	
Contact rating (resistive load)	200A 250VAC	
Max. Switching Voltage	440VAC	
Max. Switching Current	200A	
Max. Switching Power	50000VA	
Life	Mechanical life	5×10 ⁵ OPS
	Electrical life	5×10 ³ OPS

Performance Parameter		
Release Time	60ms Max	
Operate Time	60ms Max	
Dielectric strength	coil & contact	4000VAC 50/60Hz (1 Min)
	between open contacts	4000VAC 50/60Hz (1 Min)
Insulation resistance	500MΩ Min. (500VDC)	
Ambient temperature	-40°C~+70°C	
Relative humidity	45%-90% RH	
Vibration	10-55Hz, 1.5mm	
Impulsion	98m/s ²	
Weight(without accessory)	1000g	

Part Numbering:

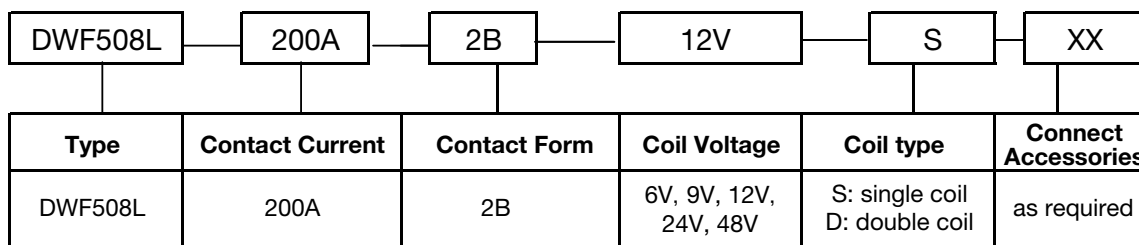

Typical application

- Intelligent Electric Meter
- Compound switch
- Electric Remote Control
- Leakage protector



Coil Parameter (20°C)

Rated Coil (VDC)	Coil Resistance (Ω) \pm 10%		Coil Power (W)		Release Voltage (VDC)	Operate Voltage (VDC)	Over Voltage (VDC)
	Single Coil	Double Coil	Single Coil	Double Coil			
6	4	2/2	8.5W	17.0W	\leq 4.8	\leq 4.8	9.0
9	10	5/5			\leq 7.2	\leq 7.2	13.5
12	17	8.5/8.5			\leq 8.4	\leq 8.4	18.0
24	68	34/34			\leq 16.8	\leq 16.8	36.0
48	271	135/135			\leq 33.6	\leq 33.6	72.0

Dimensions, Wiring Diagram (unit:mm)

