



DATA SHEET

WPSPG Spark Gap Protectors – M Series

Part Numbering System

WPSPG - 20 M 200
(1) (2) (3) (4)

(1) World Products Spark Gap Protector

(2) DC Spark-over Voltage
Tolerance: (Example: 20=20% tolerance)

(3) Series Type
M = Medium Current

(4) DC Spark-over Voltage:
(Example: 200 = 200V)

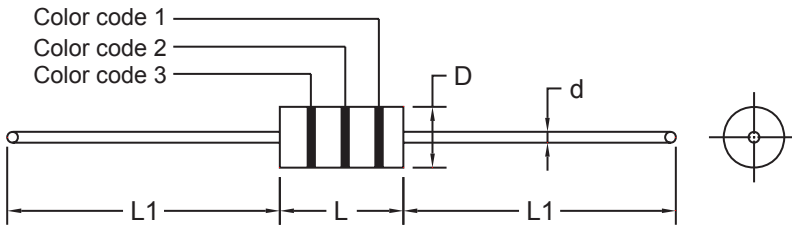


FEATURES:

1. RoHS Compliant and Halogen Free
2. UL497B – File #E135015 (see specific voltage values)
3. Fast Responding
4. Low Capacitance
5. Zero leakage current
6. Stable electrical characteristics over time
7. Can withstand repeated surges
8. Symmetrical

DATA SHEET

WPSPG Spark Gap Protectors – M Series

DIMENSIONS in mm.


Item		DC Spark-over Voltage
L	4.3 ± 0.5	140V - 700V
	6.7 ± 3.0	1000V - 1500V
L1	28.0 ± 3.0	
D	Φ 2.6 ± 0.5	
d	Φ 0.5 ± 0.05	

ELECTRICAL CHARACTERISTICS

Part Number <small>(For "XX" designation see note below in red.)</small>	DC Spark-Over Voltage Vs (V)	Minimum Insulation Resistance		Maximum Capacitance (1KHz-6V _{MAX}) C (pf)	Surge current capacity (8/20μs)	Surge Life Test (8/20μs)
		Test Voltage (V)	IR OHM (MΩ)			
*WPSPG-XXM140	140	50	100	0.8	1000A	100A 200 times
*WPSPG-XXM200	200	100	100	0.8		
*WPSPG-XXM220	220	100	100	0.8		
*WPSPG-XXM300	300	100	100	0.8		
*WPSPG-XXM400	400	250	100	0.8		
*WPSPG-XXM500	500	250	100	0.8		
WPSPG-XXM600	600	250	100	0.8		
WPSPG-XXM700	700	250	100	0.8	500A	**
WPSPG-XXM1000	1000	500	100	0.8		
WPSPG-XXM1500	1500	500	100	0.8		

Note: Vs±XX% (DC Spark-over Voltage Tolerance 30% and 20%),140V device is only available in 30% tolerance.

EXAMPLE: XX = 20 for 20% and XX = 30 for 30%.

*UL 497B recognized (30% tolerance only).

** Same as the Static Life Test.



COLOR CODE

Part Number	Color Code 1	Color Code 2	Color Code 3
WPSPG-XXM140	Brown	Yellow	—
WPSPG-XXM200	Red	—	—
WPSPG-XXM220	Red	Red	—
WPSPG-XXM300	Orange	—	—
WPSPG-XXM400	Yellow	—	—
WPSPG-XXM500	Green	—	—
WPSPG-XXM600	Blue	—	—
WPSPG-XXM700	Purple	—	—
WPSPG-XXM1000	Black	Black	Red
WPSPG-XXM1500	Brown	Green	Red

TEST METHODS AND RESULTS

ITEM	TEST METHOD	STANDARD
Static Life	10KV with 1500pf condenser is discharged through 2KΩ resistor. 200 times at an interval of 10sec.	Rate-of-change, within± 30% insulation resistance & capacitance, conformed to rated spec.
Cold Resistance	Measurement after -40°C/1000 HRS & normal temperature/2 HRS.	Features are conformed to rated spec.
Heat Resistance	Measurement after 125°C/1000 HRS & normal temperature/2 HRS.	
Humidity Resistance	Measurement after humidity 90~95%(45°C) /1000 HRS & normal temperature/2 HRS.	
Temperature Cycle	10 times repetition of cycle -40°C/30min → normal,temp/2 min → 125°C/30min, measurement after normal temp/2 HRS.	
Solder Ability	Apply flux and immerse in molten solder 230± 5°C for 3sec up to the point of 1.5mm from body. Check for solder adhesion.	Lead wire is evenly covered by solder.
Solder Heat	Measurement after lead wire is dipped up to the point of 1.5mm from body into 260± 5°C solder for 10sec.	Conformed to rated spec.
Pull Strength	Apply 0.5kg load for 10sec.	Lead shall not pull out or snap.
Flexural Strength	Bend lead wire at the point of 2mm from body under 0.25 load and back to its original point. Repeat 1 time.	