

WPANT10052



Application

This is a **Vertically Polarized** near-Omnidirectional Wi-Fi antenna solution for applications where board real estate is at premium. This vertically mounted antenna occupies very minimal space on the main circuit board.

We can assist your engineers to optimize mounting positions for these antennas in your specific application and can further assist to trouble shoot system integration issues such as TRP/TIS and FCC requirements. We specialize in developing customized Antenna solutions. Please contact <u>sales@worldproducts.com</u> with your specific application requirements.

Electrical	Drowerties
Electrical	Properties


Liootiloari ropolitoo	
Operating Frequency	2.4 – 2.5 GHz
Approximate Antenna Impedance [Ω]	50Ω
VSWR (Typical)*	< 2:1
Peak Gain [dBi] (Typical)*	3.5 dBi
Efficiency [%] (Typical)*	75 %
Polarization	Linear (Vertical)
Pattern	Near Omni-directional

*Note: These performance metrics were recorded with the Antenna installed on WPI test Evaluation Board. These Evaluation boards mimic the customer's circuit board in general. The Antenna has enough bandwidth to accommodate for minor tuning issues when installed on the client's actual circuit boards. In case of discrepancy, WPI engineers will assist the clients in designing proper matching circuit.

Mechanical / Environmental Properties	
Antenna Dimensions	1.22" x 0.55" x 0.031" (31mm x 14mm x 0.79mm)
Antenna Color	Black
Operating / Storage Temperature	-40°C to +125°C
Environmental	Meets standards for UL 94V-0
Hazardous Materials	RoHS Compliant



Pictures (3D Drawings)

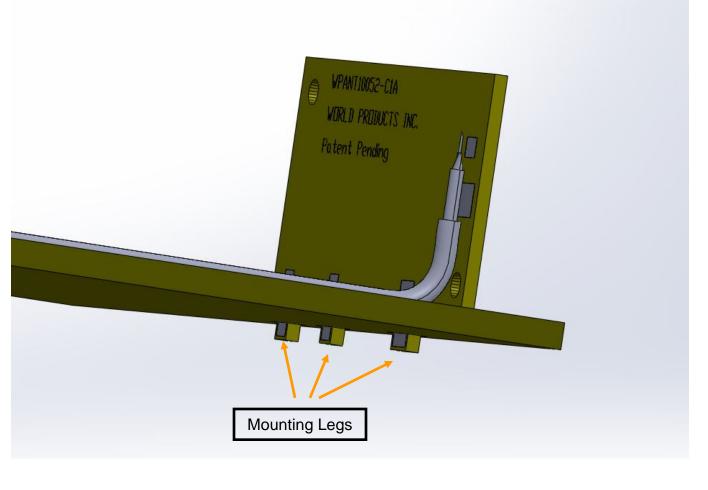

Note: There is no need for any additional Cables or Connectors. This eliminates the possibility of additional overhead for the Clients. Antenna is soldered directly in place on the Eval board.



