


WPANT10102

Dual-band ISM Embedded Antenna

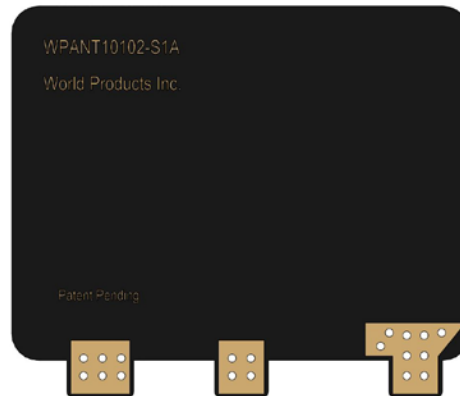

Note: Prototype shown.

Application

Dual-band ISM solution for applications where board real estate is at premium. This vertically mounted antenna occupies very minimal space on the main circuit board.

We can assist your engineers to optimize mounting positions for these antennas in your specific application and can further assist to trouble shoot system integration issues such as TRP/TIS and FCC requirements. We specialize in developing customized Antenna solutions. Please contact sales@worldproducts.com with your specific application requirements.

Electrical Properties


Operating Frequency	860 – 930 MHz	2.4 – 2.5 GHz
Approximate Antenna Impedance [Ω]	50Ω	50Ω
VSWR (Typical)*	< 2:1	< 2:1
Peak Gain [dBi] (Typical)*	2 to 2.5 dBi	5 dBi
Efficiency [%] (Typical)*	80 %	75 to 80 %
Polarization	Linear	Linear
Pattern	Near Omni-directional	Near Omni-directional

*Note: These performance metrics have been measured with the antenna installed on a WPI evaluation board.

Mechanical / Environmental Properties

Antenna Dimensions	1.3" x 1.03" x 0.041" (34.1mm x 26.3mm x 1mm)
Antenna Color	Black
Operating / Storage Temperature	-40°C to +85°C
Environmental	Meets standards for UL 94V-0
Hazardous Materials	RoHS Compliant

Picture

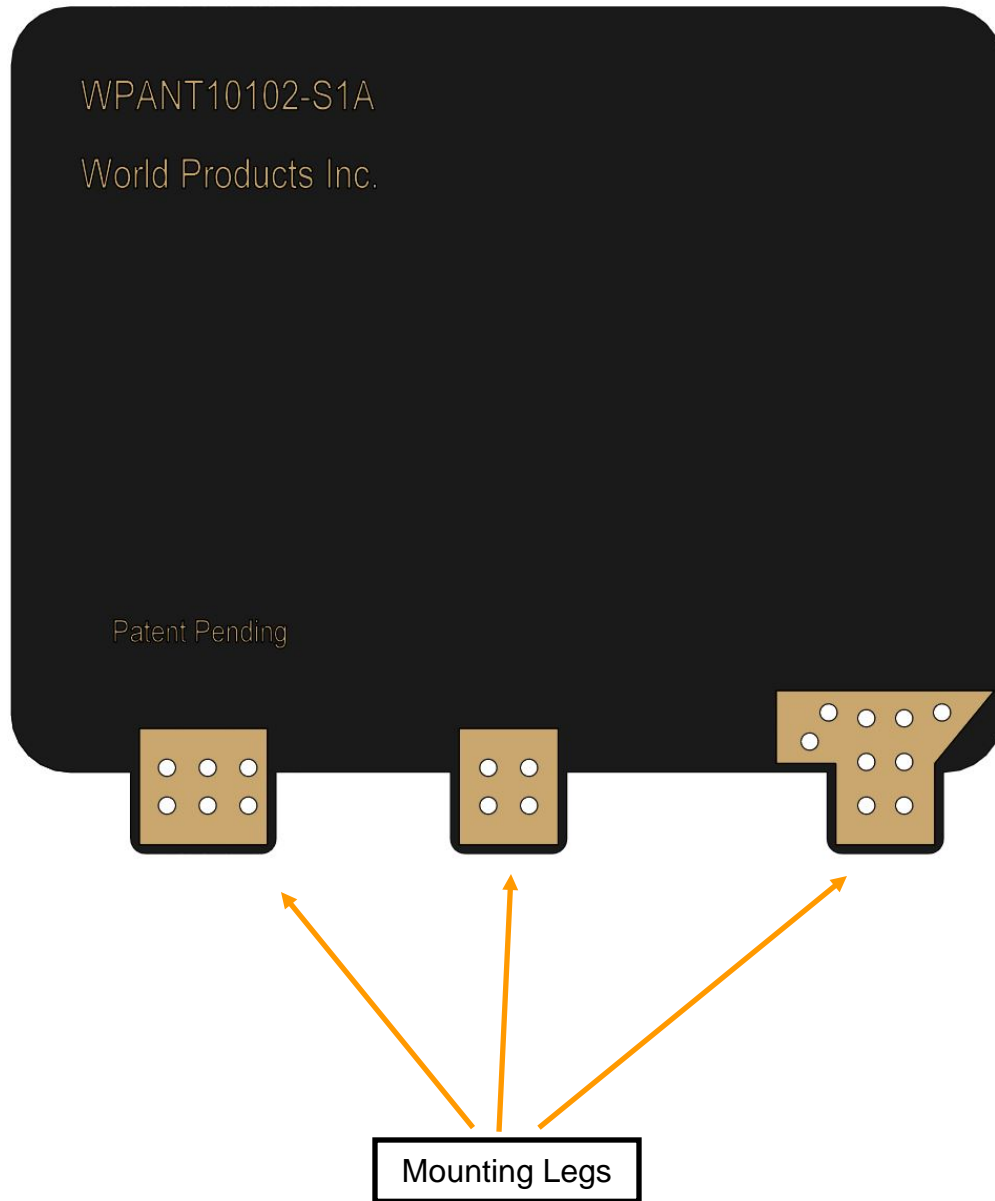

Note: There is no need for any additional cables or connectors. Antenna is soldered directly in place on the Circuit board. This eliminates the possibility of additional overhead for the clients.